



Part Number	Inductance L(uH) 10 KHz @ 0.10V	DCR (Ohms) MAX	I rms (Amps)	Dimensions (mm)			
				A +/- 0.5	B +/- 0.5	C MAX	D REF
MSB0403-180TM	18	0.166	0.72	4.8	4.8	3.0	1.6
MSB0403-220TM	22	0.235	0.70	4.8	4.8	3.0	1.6
MSB0403-270TM	27	0.281	0.58	4.8	4.8	3.0	1.6
MSB0403-330TM	33	0.378	0.56	4.8	4.8	3.0	1.6
MSB0403-390TM	39	0.384	0.50	4.8	4.8	3.0	1.6
MSB0403-470TM	47	0.587	0.48	4.8	4.8	3.0	1.6
MSB0403-560TM	56	0.625	0.41	4.8	4.8	3.0	1.6
MSB0403-680TM	68	0.700	0.35	4.8	4.8	3.0	1.6
MSB0403-820TM	82	0.915	0.32	4.8	4.8	3.0	1.6
MSB0403-101TM	100	1.020	0.29	4.8	4.8	3.0	1.6
MSB0403-121TM	120	1.270	0.27	4.8	4.8	3.0	1.6
MSB0403-151TM	150	1.350	0.24	4.8	4.8	3.0	1.6
MSB0403-181TM	180	1.540	0.22	4.8	4.8	3.0	1.6

GENERAL PARAMETERS: Layout, Schematic, Packaging

Solder Pad Layout

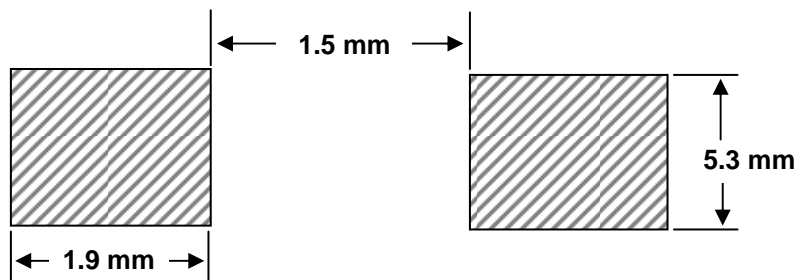

PACKAGING

